

## Model: GP-HS25P-36C1 (25.08 Watts single output)

### Features

- Universal AC Input 90~295VAC.
- Constant Current Operation.
- For High Brightness Light-Emitting Diode products.
- Built-in PFC Function.
- Fully Isolated Plastic Case.
- Protections: OTP / SCP / OVP.
- THD <20% at 240VAC/50Hz.
- Operation From -20°C ~50°C Full Load.
- Class 2 Power Supply Unit.
- IP67 Class.

### Approvals

**CE FC SELV IP67**



### Size

190 \* 30.5 \* 25 mm (L\*W\*H)




### Specifications

Model No.		GP-HS25P-36C1
Output	DC Voltage Range	21V ~ 38V
	Rated Current Range	660mA
	Rated Power	25.08W
	Ripple & Noise (Max.)	3V
	Efficiency at 240VAC (Typ.)	85%
	Current Tolerance	±8%
	Set up time (Max.)	2.5 Sec / 115VAC
Input	Rated Voltage	100 ~ 240VAC / 277VAC for North American Only 141~392VDC
	Voltage Range	90 ~ 295VAC
	Frequency Range	47 ~ 63Hz
	AC Current (Max.)	0.4A at 120VAC / 0.2A at 240VAC
	Power Factor	>0.98 at 120VAC / >0.9 at 240VAC / full load
	Inrush Current (Max.)	COLD START 20A at 264VAC
	Leakage Current	<0.25mA / 230VAC
Protections	Short Circuit	YES, No Damage
	Over Voltage	110% ~ 150% Output Voltage
	Over Temperature	Rth: By NTC define Type: auto-recover mode
Environment	Operation Temperature	-20°C ~50°C full load
	Operation Humidity	20% ~ 95% RH non-condensing.
	Storage Temp.	-40 ~ +80°C
	Storage Humidity	10% ~ 95% RH
	Vibration	10~500 Hz, 2G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes.

Safety & EMC	Safety Standards	EN61347-1,EN61347-2-13, Independent ; IP65 Approved.
	Withstand Voltage	Meet I/P-O/P: 3.75KVAC
	Isolation Resistance	Meet I/P-O/P:100M ohms / 500VDC at 25°C
	EMI Conduction & Radiation	Meet Compliance to EN55015,FCC part 15
	Harmonic Current	Meet Compliance to EN61000-3-2 Class C
	EMS Immunity	Meet Compliance to EN61000-4-2,3,4,5,6,11;EN61547
Others	MTBF	200K hours min. MIL-HDBK-217F(25°C)
	Dimension(L x W x H)	190 x 30.5 x 25mm; 209g/pcs
Note	1. All specifications not specially mentioned are measured at 230VAC and 25°C ambient temperature. 2. Ripple & Noise are measured at 20MHz bandwidth by using a 12" twisted pair-wire terminated with 0.1uf & 47uf parallel capacitor. 3. Current Tolerance: includes line regulation, load regulation and set-up tolerance.	

### Mechanical Specification

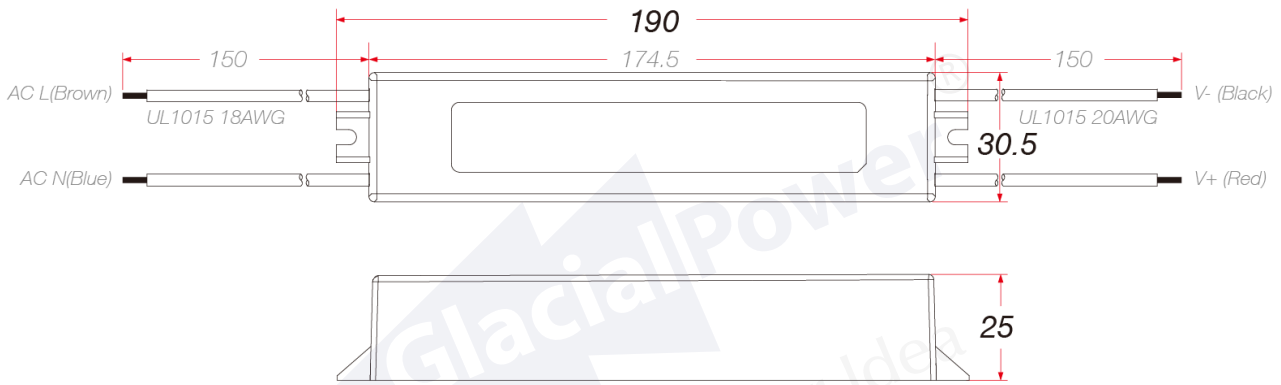

### Derating Curve

