

Model: GP-HS25P Series

Features

- Constant Current Operation.
- Universal AC input 90~295VAC.
- For High Brightness Light-Emitting Diode Products.
- Built-in PFC Function.
- Fully Isolated Plastic Case.
- Protections: OVP/SCP/OTP.
- THD < 20% at 240VAC/50Hz.
- Operation From -20°C ~50°C Full Load.
- Class 2 Power Supply Unit.
- IP67 Class.

Approvals



Size

174.5 * 30.5 * 25 mm (L*W*H)




Specifications

HS25P-xxC xx: for Output Voltage C: mean that Constant Current Mode

Model No.		GP-HS25P-12C	GP-HS25P-18C	GP-HS25P-24C	GP-HS25P-36C
Output	DC Voltage Range	8V ~ 12V	12V ~ 18V	16V ~ 24V	21V ~ 36V
	Rated Current Range	2100mA	1400mA	1050mA	700mA
	Rated Power	25.2W	25.2W	25.2W	25.2W
	Ripple & Noise (Max.)	3V	3V	3V	3V
	Efficiency at 240VAC (Typ.)	82%	83%	84%	85%
	Current Tolerance	±8%	±8%	±8%	±8%
	Set up time (Max.)	2.5 Sec / 115VAC			
Model No.		GP-HS25P-48C1	GP-HS25P-48C	GP-HS25P-52C	GP-HS25P-52C1
Output	DC Voltage Range	33V ~ 42V	35V ~ 48V	42V ~ 52V	42V ~ 52V
	Rated Current Range	600mA	520mA	480mA	350mA
	Rated Power	25.2W	24.9W	24.9W	18.2W
	Ripple & Noise (Max.)	3V	3V	4V	4V
	Efficiency at 240VAC (Typ.)	84%	85%	85%	82%
	Current Tolerance	±8%	±8%	±8%	±8%
	Set up time (Max.)	2.5 Sec / 115VAC			
Input	Voltage Range	90 ~ 295VAC			
	Frequency Range	47 ~ 63 Hz			
	AC Current (Max.)	0.4A at 120VAC / 0.2A at 240VAC			
	Power Factor	>0.98 at 120VAC / >0.9 at 240VAC / full load			
	Inrush Current (Max.)	COLD START 20A at 264VAC			
	Leakage Current	<0.25mA / 230VAC			
Protections	Short Circuit	YES, No Damage			
	Over Voltage	110% ~ 150% Output Voltage			
	Over Temperature	Rth: By NTC define Type: auto-recover mode			
Environment	Operation Temperature	-20°C ~50°C full load			
	Operation Humidity	20% ~ 95% RH non-condensing.			
	Storage Temp.	-40 ~ +80°C			
	Storage Humidity	10% ~ 95% RH			
	Vibration	10~500 Hz, 2G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes.			

Safety & EMC	Safety Standards	UL8750 , EN61347-1,EN61347-2-13, Independent ; IP65 Approved.
	Withstand Voltage	Meet I/P-O/P: 3.75KVAC
	Isolation Resistance	Meet I/P-O/P:100M ohms / 500VDC at 25°C
	EMI Conduction & Radiation	Meet Compliance to EN55015,FCC part 15
	Harmonic Current	Meet Compliance to EN61000-3-2 Class C
	EMS Immunity	Meet Compliance to EN61000-4-2,3,4,5,6,11;EN61547
Others	MTBF	200K hours min. MIL-HDBK-217F(25°C)
	Dimension(L*W*H)	174.5 * 30.5 * 25mm
	Packing(L*W*H)/Carton	50pcs/Carton
	Weight	0.22 Kg
Note	1. All specifications not specially mentioned are measured at 230VAC and 25°C ambient temperature. 2. Ripple & Noise are measured at 20MHz bandwidth by using a 12" twisted pair-wire terminated with 0.1uf & 47uf parallel capacitor. 3. Current Tolerance: includes line regulation, load regulation and set-up tolerance.	

Derating Curve

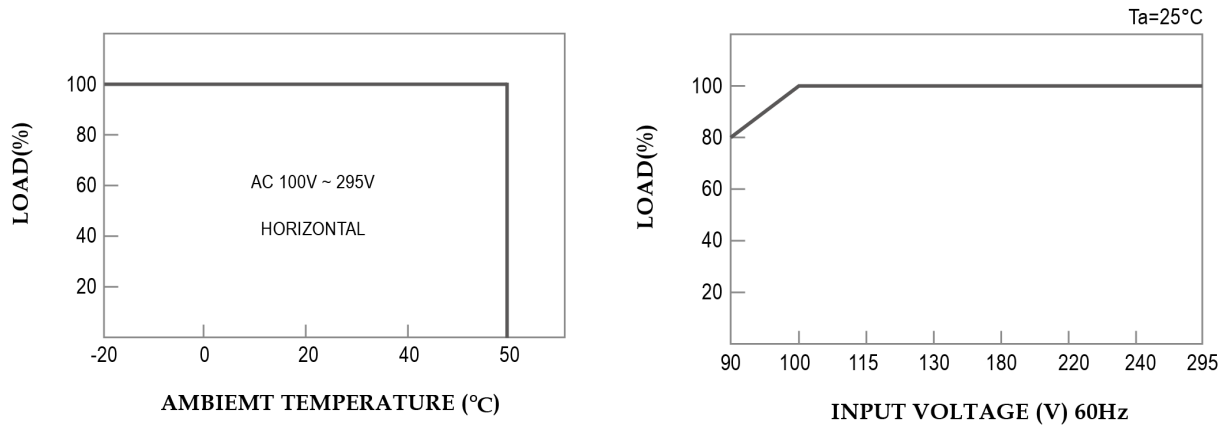

Mechanical Specification

