


Model: GP-HS10P 3 In 1 Dimming (8~13 Watts single output)

Features

- For High Brightness Light-Emitting Diode products.
- Universal AC input 90~264VAC.
- Fully isolated plastic case.
- Built-in 3 in 1 dimming design.
- Operation from -20°C ~50°C full load.
- Protections: OTP / SCP.
- Class II power design without earth pin.
- IP67 class.

Approvals



Size

110 * 35 * 25 mm (L*W*H)




Specifications

GP-HS10P-xxCA xx: for Output Voltage
C: mean that Constant Current Mode A: Dimming

Model No.		GP-HS10P-24CA1	GP-HS10P-36CA
Output	DC Voltage	24V	36V
	Rated Current Range	350mA	350mA
	Rated Max. Power	8.4W	12.6W
	Efficiency	80%	81%
	DC Voltage Range	14 ~ 24V	24 ~ 36V
	Current Tolerance	±5%	±5%
	DC Dimming	DC 1-10V or Electronic Potentiometer 1-10V	
	PWM Dimming	Puls:Hi=10V Low=0V, Duty:0%~100%, Fsw 0.5-3KHZ	
	Resistance Dimming	10KΩ~100KΩ	
Set up Time (Max)	<2000ms at full load		
Input	Voltage Range	90VAC ~ 264VAC	
	Frequency Range	47 Hz ~ 63 Hz	
	Power Factor Correction	≥0.88 at 120VAC , ≥0.8 at 240VAC	
	AC Current	0.25A at 120VAC , 0.13A at 240VAC	
	Inrush Current	11A at 115VAC , 15A at 230VAC	
	Leakage Current	<0.25mA at 230VAC	
Protections	Over Temperature	Tc : 95°C ±10°C; Type : Hiccup Mode	
	Short Circuit	Type : Hiccup Mode	
Environment	Operation Temp.	-20°C ~50°C full load. (Refer to output load derating curve)	
	Operation Humidity	20% ~ 95% RH non-condensing.	
	Storage Temp.	-40 ~ +80°C	
	Storage Humidity	10% ~ 95% RH	
Safety & EMC	Vibration	10 ~ 500 Hz, 2G 10 min. / 1 cycle, period for 60 min. each along X, Y, Z axes.	
	Safety Standards	meet EN61347-1,EN61347-2-13	
	Withstand Voltage	I/P - O/P: 3.75 KVAC	
	Isolation Resistance	I/P-O/P : 100m ohms / 500VDC at 25°C.	
	EMI Conduction & Radiation	meet EN55015	
EMS Immunity	meet EN61000-4-2, 3, 4, 5, 6, 8, 11		

Others	MTBF	200K hours min.MIL-HDBK-217F(25°C)
	Dimension(L*W*H)	110 * 35 * 25mm
	Packing(L*W*H)/Carton	460 * 270 * 210mm
	Weight	100pcs / 14kg
Remark	1. All parameters NOT specially mentioned are measured at 240VAC input, rated load and 25°C ambient temperature. 2. Ripple & noise are measured at 20MHZ bandwidth oscilloscope and with 0.1uf & 47uf parallel capacitor. 3. The power supply is considered a component which will be installed a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.	

Derating Curve

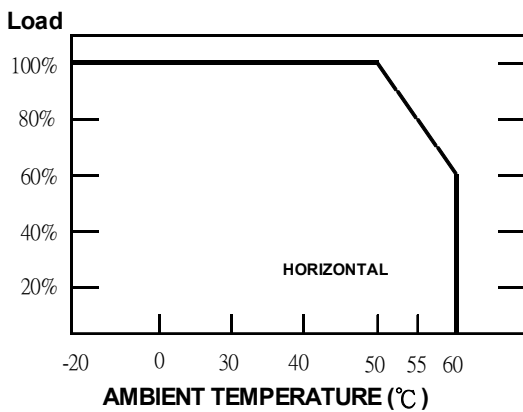

3 in 1 Dimming Control (DC/ PWM/ Resistance)

3 in 1 Dimmable Function Description

(1) 10-100KΩ Resistance Dimmable (Typical):

Resistor	Single-driver	10K	20K	30K	40K	50K	60K	70K	80K	90K	100K
	Multi-driver	10K/N	20K/N	30K/N	40K/N	50K/N	60K/N	70K/N	80K/N	90K/N	100K/N
Iout (%)		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

※ The length of extended wire for DIM+/- shall not exceed 20 meters. (Wire ≤ 20m)

※ N=The number of dimmer drivers should not exceed 15.(N ≤ 15)

(2)DC: 1-10V Dimmable (Typical):

DIM(Voltage)	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V
Iout (%)	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

(3)10V / PWM Dimmable (Typical):

DIM(10V/PWM Duty)	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
Iout (%)	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

Mechanical Specification

